
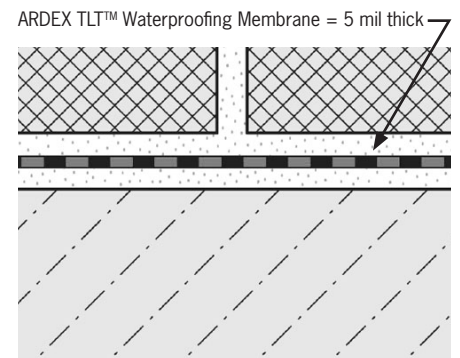


ARDEX TLT™

Waterproofing Accessories

Ceramic and stone tiles are durable, easy to maintain and hygienic, representing ideal surface coverings in wet areas. However, since tiles and grout are not inherently waterproof, it is essential to protect the substrate from moisture penetration with the ARDEX TLT™ Waterproofing Accessories.

These ARDEX TLT™ Waterproofing Accessories feature a modified polyethylene (PEVA) core with a non-woven polypropylene on both sides. The material is physiologically safe and does not require special disposal. This waterproof membrane is 5-mil thick and has a water vapor permeance of 0.051 perms, when tested according to ASTM E96, using Procedure E at 90% relative humidity.

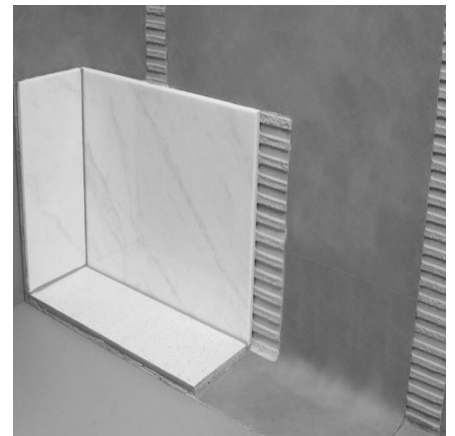

- ① ARDEX TLT™ Seam Tape
- ② ARDEX TLT™ Waterproofing Membrane
- ③ ARDEX TLT™ Outside Corner
- ④ ARDEX TLT™ Inside Corner
- ⑤ ARDEX TLT™ Mixing/Pipe Valve Seals



tile & stone
Installation Systems




www.ardexamericas.com

BUILT BY
YOU
backed by ARDEX

ARDEX TLT™

Waterproofing Accessories

ARDEX TLT™ Waterproofing Membrane is a lightweight, polyethylene membrane for use under tile and stone surfaces in showers and wet area applications. It is also suitable for chemical-resistant flooring. **ARDEX TLT™ Seam Tape** is made from the same lightweight, waterproof material as the waterproofing membrane and is for use over horizontal and vertical seams. **ARDEX TLT™ Mixing/Pipe Valve Seals** are designed to seal pipe protrusions and are for use around supply lines to shower heads, hand held wands, jets, and spray and steam heads. They act as an anti-fracture membrane between substrates and hard surface coverings. **ARDEX TLT™ Inside/Outside Corners** are constructed as a single piece from a seamless material that eliminates the potential of weak points in time-consuming jobsite-cutting techniques. They offer convenience and provide peace of mind knowing every corner is safe from water infiltration.

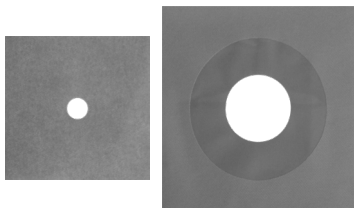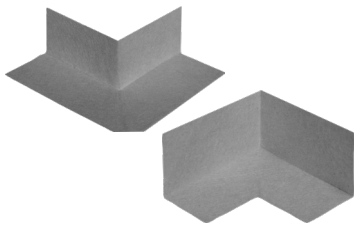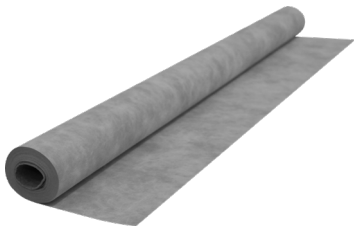

ARDEX TLT™ WATERPROOFING MEMBRANE

Name	Width	Length	Area	Thickness
ARDEX TLT™ 716	3 ft. 3 in (1 m)	32 ft. (10 m)	108 ft. ² (10 m ²)	5 mil
ARDEX TLT™ 717	3 ft. 3 in (1 m)	98 ft. 5 in (30 m)	323 ft. ² (30 m ²)	5 mil

ARDEX TLT™ SEAM TAPE

Name	Width	Length	Thickness
ARDEX TLT™ 709	4.7 in (12 cm)	33 ft (10 m)	5 mil
ARDEX TLT™ 710	4.7 in (12 cm)	66 ft (20 m)	5 mil
ARDEX TLT™ 711	4.7 in (12 cm)	98 ft (30 m)	5 mil

ARDEX TLT™ CORNERS

Name	Description	Thickness	Degree
ARDEX TLT™ 704	Inside Corner	5 mil	90°
ARDEX TLT™ 705	Outside Corner	5 mil	90°
ARDEX TLT™ 706	Inside Corner	5 mil	135°
ARDEX TLT™ 707	Outside Corner	5 mil	135°

ARDEX TLT™ MIXING/PIPE VALVE SEALS

Name	Description	Thickness
ARDEX TLT™ 713	Pipe Collar	5 mil
ARDEX TLT™ 714	Mixing Valve Collar	5 mil



tile & stone
Installation Systems

www.ardexamericas.com

BUILT BY
YOU
backed by **ARDEX**