

ARDEX TL 1400™

Self-Leveling Underlayment


The easy way to achieve an optimal smooth, flat surface for installing tile, especially when installing large and super format tile and stone!

ARDEX TL 1400™ is a blend of Portland cements, hydraulic cements and specialty polymers formulated to smooth substrates prior to installing tile and other floor coverings on, above and below grade. ARDEX TL 1400 is easy to mix with just water resulting in a pourable and pumpable material that finds its own level and delivers a flat, durable surface that is especially suited for large and super format tile and stone installations, as well as most other types of floor coverings.

- For smoothing substrates prior to tiling over interior concrete, terrazzo, tile, epoxy coatings and non-water soluble adhesive residue over concrete
- Installs up to 1 1/4" (3 cm) neat
- Can be tapered to meet existing elevations
- Walk on in 2 to 3 hours; Install tile in 6 hours
- Interior use only

For more information, visit www.ardexamericas.com

AF477_02/2020

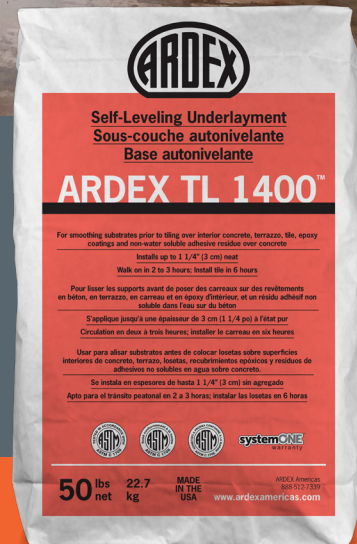

ARDEX Americas
400 Ardex Park Drive
Aliquippa, PA 15001
888-512-7339

www.ardexamericas.com

systemONE
warranty