

PRODUCT FEATURES




Fast Release Guard

The quick release pull pin keeps the blade guard locked down for safety during operation. No more jam nuts or tools needed - just pull and lift.



Tough Frame and Raised Axle

Thick, heavy-duty gauge metal frame endures the hardest of users and job sites. Resists twisting for a tried and true straight cut.

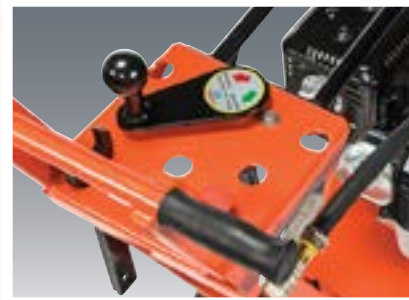

Uncomplicated Control Panel

Everything at your fingertips to manage the saw with ease: depth locking mechanism, emergency shut off and water valve within easy reach.



Rental equipment has to withstand any and all conditions by user and application. For that reason, the Norton Clipper C13PE suits any rental fleet that both the novice and expert will appreciate to hold-up through tough situations. The 18" blade guard, ride-on water system and quick-release blade guard lock all keep safety in mind while the rugged frame, powerful engine and easy-to-use console makes cutting a breeze.

TECHNICAL SPECIFICATIONS

PRODUCT #	C13PE
UPC	701846 47524
Blade Guard Capacity - in (mm)	18" (457)
Maximum Depth of Cut - in (mm)	6-5/8" (168)
Arbor Size - in (mm)	1" (25)
Blade Flange Diameter - in (mm)	4-1/2" (114)
Blade Shaft RPM	2,700
Blade Shaft Diameter - in (mm)	1.00" (25.4)
Blade Shaft Bearings	Heavy Duty Pillow Block
Blade Shaft Drive	3 Belts
Blade Guard Attachment	Hinged, All Steel
Blade Control	Hand Wheel/Screw Feed
Axle - Front - in (mm)	3/4" (19)
Axle - Rear - in (mm)	3/4" (19)
Wheels - Front - in (mm) D x W x B	4" x 1.5" x 3/4" (102 x 38 x 19)
Wheels - Rear - in (mm) D x W x B	8" x 2.50" x 3/4" (203 x 64 x 19)
Handle Bars/Adjustment Length - in (mm)	-NA-
Water Tank Capacity - gal (l)	-NA-
Control	Push
Chassis	Heavy Duty Box Design
Power Source	Gasoline, Single Cylinder 4 Cycle
Motor/Engine Type	Honda GX390
Specifications	GX390K1QXC9
Maximum Horsepower*	13 HP (9.5 kW)
Net Horse Power*	11 HP (8.2 kW)
Displacement - cu In (l)	23.7 cu in (0.39 l)
Bore - in (mm)	3-1/2" (88)
Stroke - in (mm)	2-1/2" (64)
Cylinders/Cycle	Single Cylinder 4 Cycle
Fuel Capacity - gal (l)	1.79 gal. (6.5 l)
Oil Capacity - qt (l)	1.16 qt. (1.1 l)
Air Filter	Four Stage Cyclone
Starter	Manual
Engine Cooling	Forced Air

SAW DIMENSIONS

Height - in (mm)	38-13/16" (986)
Minimum Saw Length (Transport) - in (mm)	42-3/4" (1086)
Maximum Saw Length (Working) - in (mm)	63" (1600)
Maximum Pointer Length - in (mm)	20" (508)
Frame Width - in (mm)	16-1/2" (419)
Saw Width - in (mm)	21-27/64" (544)
Front (Outside to Outside Wheel Width) - in (mm)	14-17/32" (369)
Rear (Outside to Outside Wheel Width) - in (mm)	19-9/32" (490)
Blade to Wall - in (mm)	1-23/32" (44)
Wheel Base Length - in (mm)	15-3/4" (400)
Weight Crated - lbs. (kg)	240 (109)
Weight - Uncrated - lbs (kg)	220 (100)

*= DATA PROVIDED BY MOTOR/ENGINE MANUFACTURER

GENUINE NORTON CLIPPER DIAMOND BLADE INCLUDED WITH SAW.