



High Speed Diamond Blades



C/A-34GD Guardian ARIX Combo Blade

The DITEQ C/A-34GD ARIX Guardian blade is designed for a variety of machines – high-speed saws, masonry saws, 20 Hp and lower walk-behind concrete saws. The ventilated core helps prevent overheating. Use wet or dry.

DITEQ offers our 24" Guardian PRO blade with solid core for low horsepower (5-35 hp) walk behind saws. It features G3 ARIX™ turbo and standard segments with inserts for undercut protection. Fast wet cutting on concrete or asphalt. The 24" blade must be used WET.

FEATURES

- Cuts Cured Concrete, Pavers, Brick, Block, and Asphalt
- DITEQ's Newest G3 ARIX technology
- Super high quality diamonds for optimal segment strength
- Tall segments for longer blade life
- Wear Guard deep segment
- Ventilated core for better air-cooling while dry cutting

TECH SPECS

- .512" MEGA segment height
- 12"–20" blades have three different segments
- Wet/Dry Use
- 24" blade must be used WET
- 1" or 20 mm Arbor with bushing

C/A-34GD Guardian Combo

Fast Cut/Longest Life

Diameter & Width	Part Number
12" x .125" x 1"-20 mm DP	D11030
12" x .125" x 20 mm DP	D11050
14" x .125" x 1"-20 mm DP	D11031
14" x .125" x 20 mm DP	D11051
16" x .125" x 1"-20 mm DP	D11032
16" x .125" x 20 mm DP	D11052
18" x .125" x 1"-20 mm DP	D11033
20" x .145" x 1"-20 mm DP	D11034
24" x .145" x 1" DP*	D11080

*Blade must be used WET




D11031



MEGA Segment


G3 ARIX™ Turbo Standard Deep Undercut

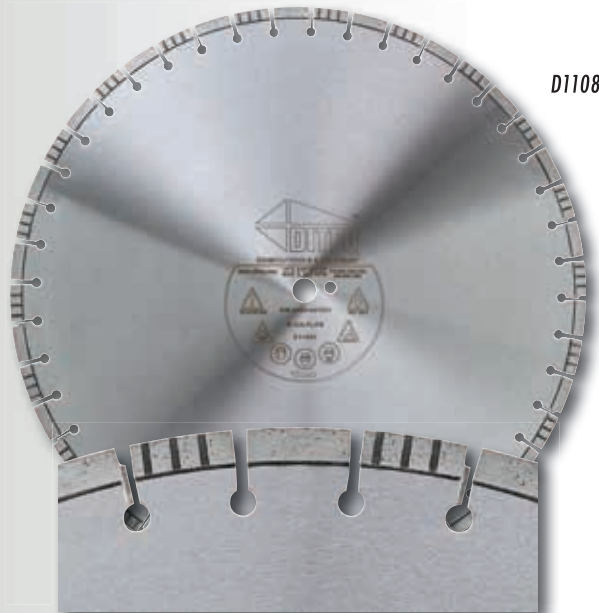

D11080



G3 ARIX™ Turbo Standard with insert
.512" / 13 mm segment height



05/10/2023